



ASSEMBLY INSTRUCTIONS

Adult Assembly Required
Save these instructions for future use

MODEL #'s: 763 Ecru/Beige Gingham & 764 White/Sage Gingham
NAME: Keep Your Baby Close Bassinet

TOOLS NEEDED: Phillips Screwdriver, Hammer

** Power screwdriver is helpful but keep the torque setting low so you don't strip the screws or damage the bassinet*

PARTS INCLUDED:

- (B) 2 - Metal Side Frames/Legs
- (C) 1 - Bottom Back Rail (5 holes)
- (D) 1 - Bottom Front Rail (4 holes)
- (F) 1 - Top Back Rail (3 holes)*
- (G) 1 - Top Front Rail (2 holes)*
- (H) 1 - Bottom Platform Board
- (J) 1 - Canopy Pole
- (K) 1- Canopy Frame
- (L) 4 - Wheels
- (M) 1 - Mattress Pad (not shown)

** The top rails are already inserted into the pockets on the Bumper/Liner (E)*



HARDWARE INCLUDED:

- (A) 8 - 2" Wood Screws
- (I) 4 - 1 $\frac{3}{4}$ " Bolts
- (Q) 2 - 1 $\frac{1}{4}$ " Bolts
- (R) 6 - T-Nuts
- (S) 6 - Washers (not shown)

BEDDING INCLUDED:

- (E) 1 - Bumper/Liner
- (N) 1 - Skirt
- (O) 1 - Sheet
- (P) 1 - Canopy

Bedding can be machine washed & ironed before assembly if desired.

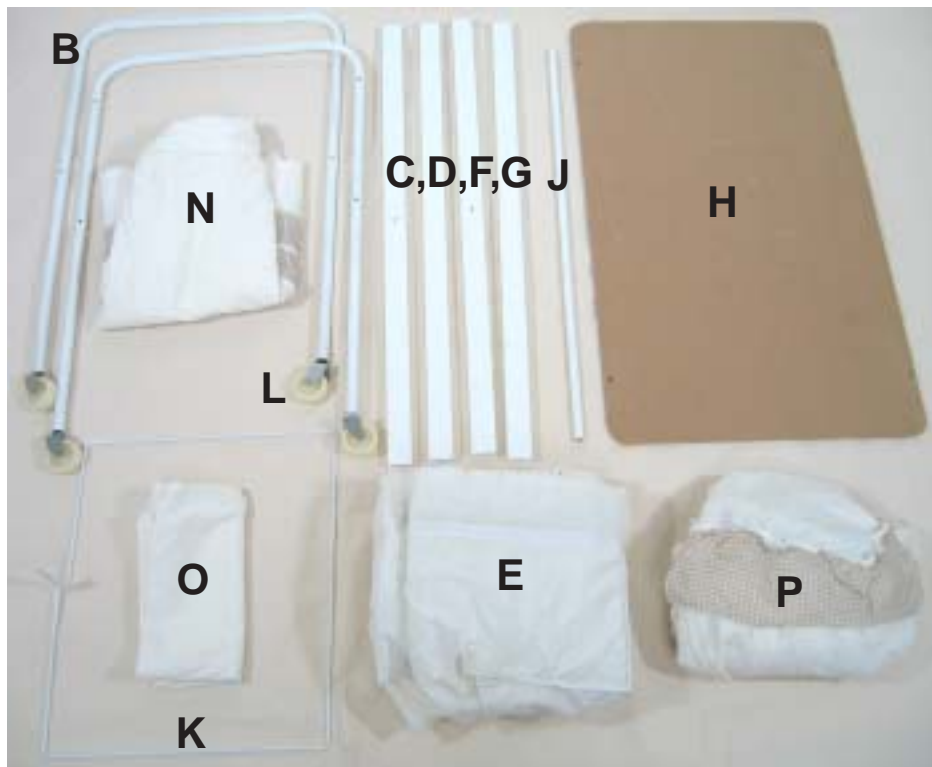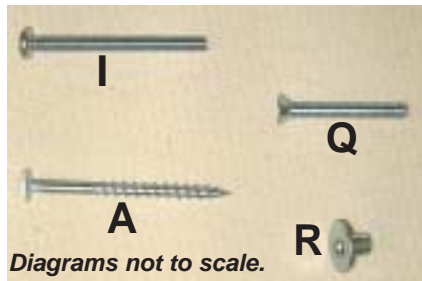

**BEFORE
YOU
BEGIN
ASSEMBLY:**

Ensure that all the parts and hardware listed above are included. If anything is missing, please do not return the product to the store. Call or e-mail us for assistance.

Visit us online at www.badgerbasket.com

Toll-Free Customer Service: 1-800-236-1310

(Monday through Thursday 7:30 AM to 4:30 PM CST), cs@badgerbasket.com

PLANT AND GENERAL OFFICE: PO Box 227, Edgar, WI 54426-0227


Phone: 715-352-2311 Fax: 715-352-3163

CORPORATE OFFICE: 111 Lions Dr., Suite 220, Barrington, IL 60010

STEP 1: See PICTURES 1A and 1B.

Using FOUR 2" SCREWS (A), attach the BOTTOM BACK RAIL (C) and BOTTOM FRONT RAIL (D) to the TWO SIDE FRAMES (B).

The "dimples" on metal side frames should face out so the screws heads will be flush against the surface when screwed in (Picture 1A).

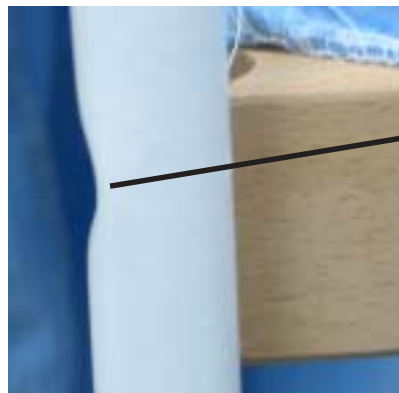


PICTURE 1A:
Side view close-up
of the dimple on
the metal tube for
screw head.

STEP 2: See PICTURE 2.

Check the BUMPER/LINER (E) for a small hole at the top middle of one of the long edges. This indicates the TOP BACK RAIL (F).

Using FOUR 2" SCREWS (A) Attach the TOP BACK RAIL (F) and TOP FRONT RAIL (G) to the SIDE FRAMES (B). Be sure the top back rail (F) is attached on the same side as the bottom back rail (C).

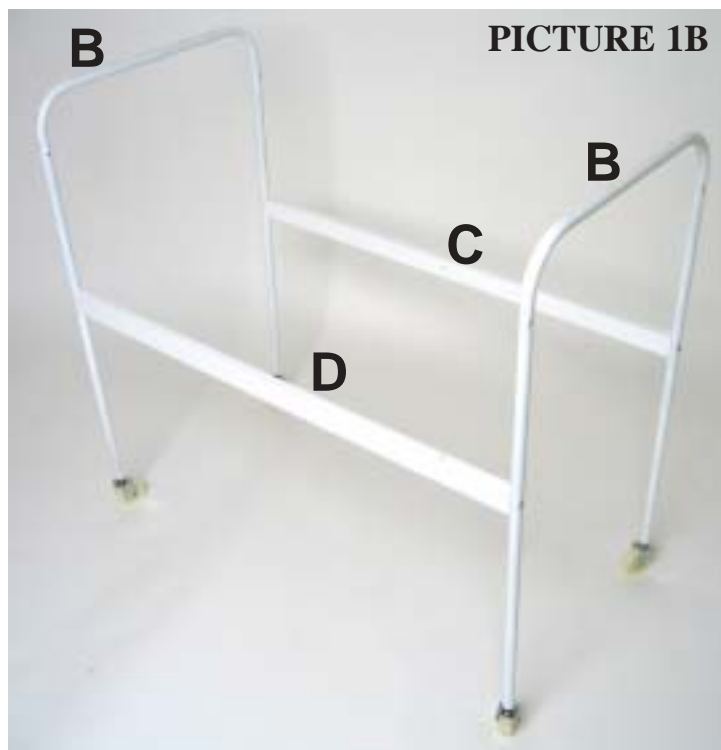

PICTURE 1B

STEP 3: See PICTURES 3A AND 3B.



Put the BOTTOM PLATFORM BOARD (H) into the bassinet and adjust the fabric so the board is pushed down as far as possible to the bottom.

Using FOUR 1¾" BOLTS (I), FOUR WASHERS (S), and FOUR T-NUTS (R), secure the BOARD (H) to the BOTTOM RAILS (C, D).

Slip a WASHER (S) onto each bolt. Then as illustrated in PICTURE 3B, the BOLTS (I) go down through the pre-drilled holes on the BOARD (H), through the FABRIC LINER (E) (make holes in the liner as necessary), and RAILS and screw into T-NUTS (R) that you insert into the holes on the bottom edges of the RAILS (C, D).

Screw the bolts into the T-Nuts so all the parts and layers are tight and flush against each other.

PICTURE 3A - Inside View

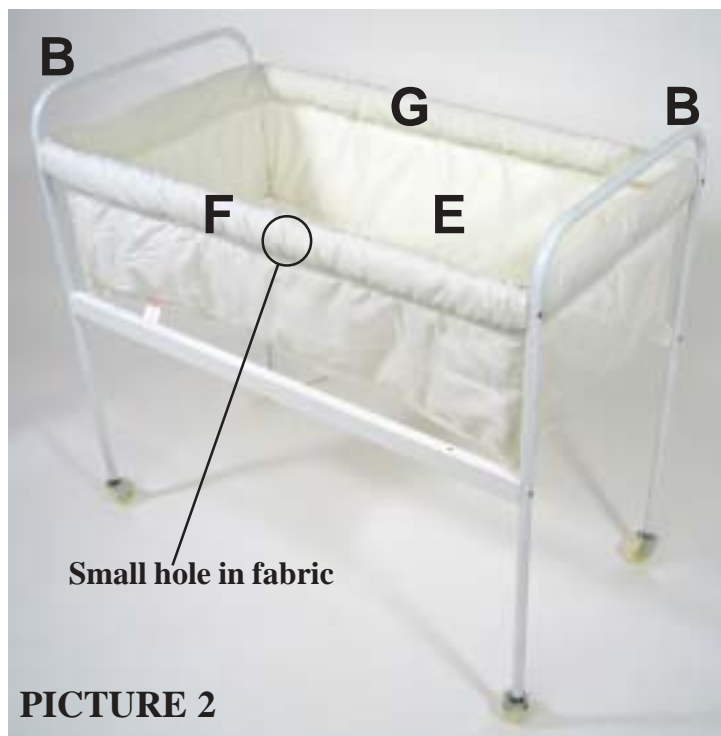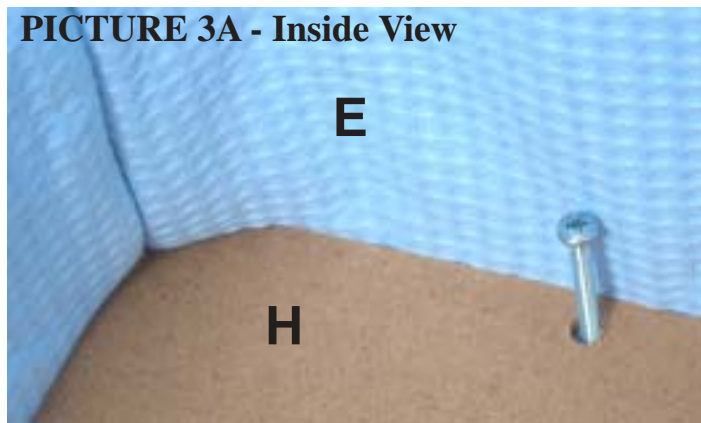

PICTURE 2

STEP 4: See PICTURE 4.

Attach the CANOPY POLE (J) to the TOP and BOTTOM BACK RAILS (C, F) using TWO 1¼" BOLTS (Q), TWO WASHERS (S) and TWO T-NUTS (R).

The canopy pole has dimples for the bolt heads. Push the bolts through the pre-drilled holes on the metal pole and screw into T-NUTS (R) inserted into the holes on the inside faces of the rails. Fully tighten the bolts so the pole stays in place.

Note: The T-NUT (R) on the inside of the TOP Back Rail (F) is installed by our factory. Check to make sure it did not come loose or fall out in shipping because the canopy pole will not attach without the T-Nut in place.

STEP 5: See PICTURES 5A AND 5B.

As shown in PICTURE 5A, if the WHEELS (L) are not already installed, insert them into the holes on the ends of the legs (B).

Then, as shown in PICTURE 5B, grasp the leg and push down pressing the wheels firmly against the floor so they snap into place.

STEP 6: See PICTURE 6.

Attach the SKIRT (N) to the BUMPER/LINER (E) by pressing the grip tape on the skirt to the tape on the liner. Start at the middle front, work your way around, and return to the middle front. Tie the front ribbons into a bow.

Put the SHEET (O) onto the MATTRESS PAD (M) and put the pad into the bassinet. Tuck the end flap of the sheet securely under the pad.

STEP 7: See PICTURE 7.


Insert the free ends of the CANOPY FRAME (K) into the top of the CANOPY POLE (J). Tap into place with a hammer.

Place the FABRIC CANOPY (P) over the CANOPY FRAME (K) and tie the canopy to the frame using the ribbons.

STEP 8: See PICTURE 8.

The bassinet is now assembled and ready for your baby!


Additional sheets are sold separately in a package of two (Model #00027). Check our web site at www.badgerbasket.com!

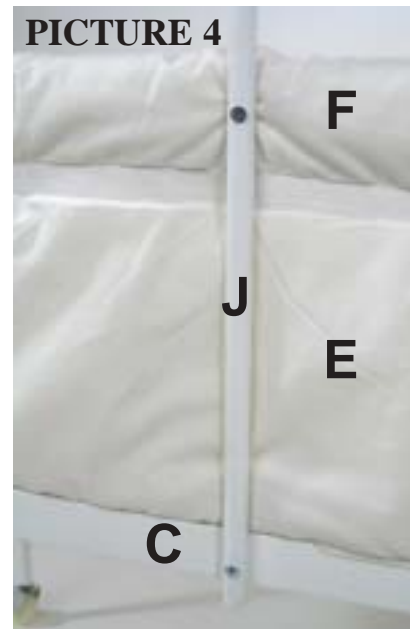

PICTURE 6



PICTURE 7

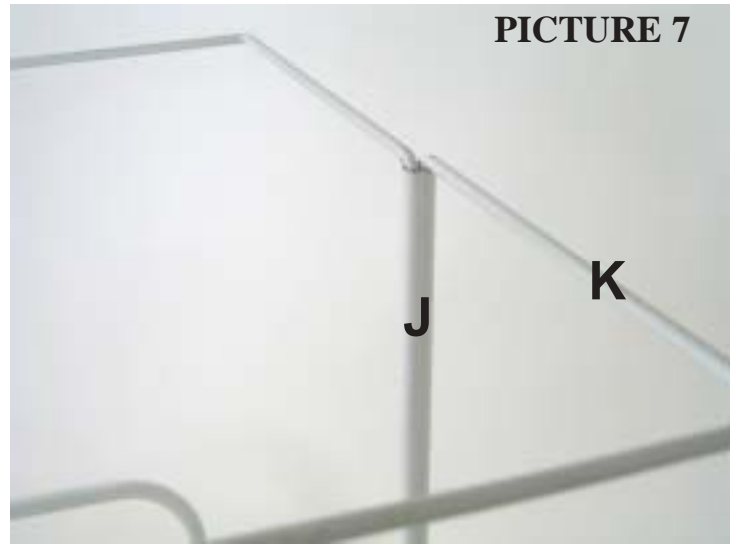

**FOR YOUR CHILD'S SAFETY TO
PREVENT SERIOUS INJURY OR DEATH:**

Do not use the bassinet if Baby is older than 3-4 months of age, weighs more than 20 lbs. (9.09 kg), or if Baby can push up, roll over, or crawl.

PICTURE 8



DO NOT use this bassinet if Baby exceeds ANY ONE of the age, weight, or activity limits mentioned above.

Baby could fall out and be seriously injured.

DO NOT move the bassinet with Baby inside of it.

DO NOT allow children or pets to hang on or pull on the bassinet. It could tip over and Baby could fall out.

DO NOT attach or place toys with strings in or around the bassinet. Strings can cause strangulation or choking.

DO NOT put loose bedding or stuffed animals into the bassinet that could cause suffocation.

Keep bassinet away from stoves, heaters, camp fires, fireplaces, stairs, open windows, window blinds, running or standing water, and any other hazard which could cause injury to your baby.

DO NOT allow pets sleep inside the bassinet with baby.

DO NOT use any mattress other than one approved by the manufacturer.

For cleaning instructions, see the fabric care labels attached to the bedding. Other parts may be wiped clean with a damp cloth and mild soap when needed.